

KWO® MultiTex® Tape – ePTFE gasket tape



KWO MultiTex® Tape is a high-quality gasket material produced from multidirectionally expanded PTFE.

The flexible material adapts well to sealing surfaces, compensates irregularities and seals at very low stresses.

Form in place PTFE gasket tape, especially used on large and irregularly shaped steel flanges or glass lined steel flanges.

Seals most chemicals across the whole pH range (0-14), typical application range up to 230°C.



★ Advantages

- > adapts well to sealing surfaces, compensates irregularities
- > superior resistance to creep and cold flow
- > very high sealability especially at very low stresses

⚙ Properties

- > high chemical resistance
- > UV resistant, non-ageing, unlimited storable
- > nontoxic, biologically inert
- > non-flammable

📦 Applications

- > flange connections
- > heat exchangers
- > reactor columns, glass lined flanges
- > uneven or distorted flanges
- > pharmaceutical- and food processing equipment

🏆 Certificates

- > BAM - suitable for use with oxygen
- > TA-Luft regulation and blow out safety acc. to VDI 2200
- > specific values according to DIN EN 13555
- > FDA 21 CFR 177.1550
- > EC1935/2004 - suitable for applications with food contact

TECHNICAL DATA

Material	100% biaxial expanded PTFE (ePTFE) without fillers
Chemical resistance	in the entire pH range (pH 0-14, except molten alkali metals and elemental fluorine)
Temperature range	-268°C (-450°F) up to +270°C (+518°F), short-term +315°C (+600°F)
Pressure range	vacuum up to +200bar (3000psi) depending on the installation situation*
Physiologically inert	physiologically harmless in all recommended applications

*Note: temperature and pressure guides cannot necessarily be used simultaneously.

Quality assurance


The KWO Quality Management is certified according to DIN EN ISO 9001. Our suppliers are also integrated in this quality system. We use exclusively high quality raw materials in the fabrication of our products, which provide the highest level of safety and reliability.



Available Dimensions

Width* [mm]	Thickness [mm]			
	2	3	6	9
10	X	X	X	
15	X	X	X	X
20	X	X	X	X
25	X	X	X	X
30	X	X	X	X
40	X	X	X	X
50		X	X	X
55		X	X	X
60		X	X	X

*Other dimensions available on request.

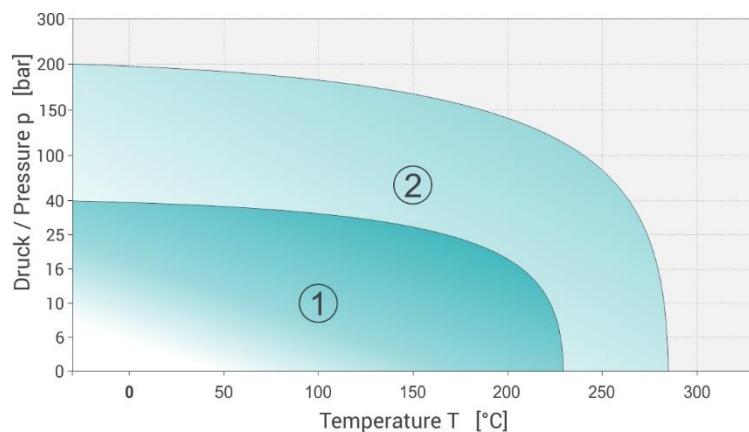

To order, please use the following text



MultiTex Tape, __ x __ mm - __ m, quantity in meter
(width) (thickness) (spool length)

The p-T diagram indicates the service limits considering the simultaneous influence of pressure and temperature.

Range 1: Typical service limits
Range 2: Maximum application limits, after technical verification

Values

Q _{MIN} (0,01)	28 Mpa	DIN EN 13555
Q _{S MIN} (0,01)	<<10 Mpa	DIN EN 13555
PQR(at Q _{smax} 20°C)	0,95	DIN EN 13555
PQR(at Q _{smax} 150°C)	0,64	DIN EN 13555

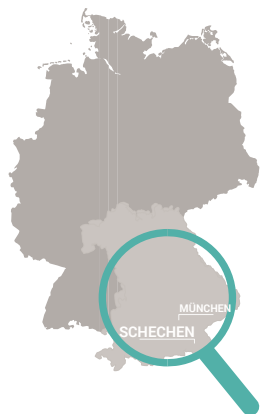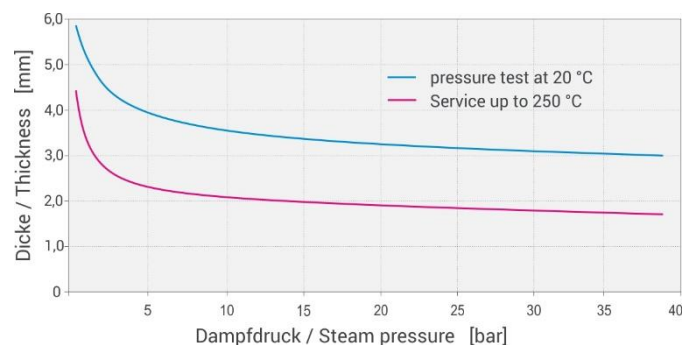

- ✓ Made in Germany
- ✓ International Presence
- ✓ Represented in over 46 countries

For detailed selection criteria, technical information, installation guideline and the relevant contact person, please visit our website: www.kwo-ptfe.de

KWO Dichtungstechnik GmbH

Am Eschengrund 3
83135 Schechen, Germany
Tel: + 49 8039 90254-0
Fax: + 49 8039 90254-299
Email: info@kwo-ptfe.de



All technical information and advice given here is based on our previous experiences and/or test results. We give this information to the best of our knowledge, but assume no legal responsibility. Customers are asked to check the suitability and usability in the specific application, since the performance of the product can only be judged when all necessary operating data are available. Specifications are subject to change without notice. KWO's terms and conditions of sale apply to the purchase and sale of the product.