


FLAT GASKET FROM UNIFLUOR® 7745

7745FD01

Flat gasket made from multi-directional stretched ePTFE.

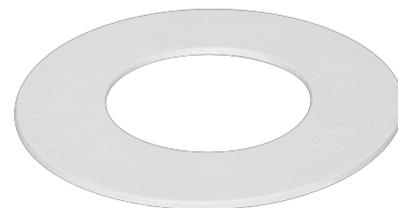

Operating data

Temperatur [min]	-269 °C
Temperatur [max]	230 °C
Pressure [max]	40 bar

Gasket characteristics EN 13555

Gasket Characteristics [IDT]

https://atopim.idt-gaskets.com/upload/files/06lsx/xjzn3/8tonu/3itw6/ned8w/tglgg/FD01 - WS 7745_2 mm_Rev00.pdf

Approvals and test reports

TA Luft 2002 [VDI 24A0/2200]

BAM oxygen

BAM oxygen [liquid]

FDA [Food]

EG 1935/2004

Flange shapes

Self-centering, Raised Face [form IBC]

Male-Female [form SR]

Glass-lined, Enamelled flange

GRP flange

Plastic flange

Apparatus, customized

With partition bars

This datasheet on the internet: <https://idt-gaskets.com/products/gaskets/61f7e4966ee567b37>

General information: All information given in this Technical Information sheet represents our current level of knowledge and serves as information on our products and their respective scopes. It is not meant to ensure any particular properties of any product or the suitability of any product for any specific application, neither does it create any liability on our part. © Copyright by IDT

Essen: +49 201 855110 · Annaberg-Buchholz: +49 3733 5050 · München: +49 89 9918830

Further sealing systems and technical information can be found [idt-gaskets.com](https://www.idt-gaskets.com)

Last Changed 2025-07-18