


PTFE SEALING TAPE WITH PTFE IMPREGNATION

1724-1725

- Braided hose made of highly stretched, white PTFE filament yarn, very cross-sectionally dense and structurally stable

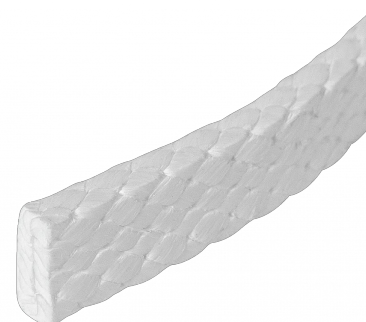

Features

Temperatur [min]	-269 °C
Temperatur [max]	260 °C
Density approx. [g/cm ³]	1.7 g/cm ³
Material structure	PTFE
Waterproofing	PTFE
Lubricant	nein [1724]/ja [1725, silikonfrei]

Fields of application

Static [p]	10 bar
------------	--------

Applications

abrasive and sticky media	limited suitability
Water, Process water, Lake water	suitable
Hot water, boiler dining water	suitable
Vapors, acid gases, nitrogen	suitable
Oxygen	not suitable
Mineral oils, animal fats	suitable
Heat carrier oils, synthetic oils	suitable
Alcalia diluted, salt solutions	suitable
Alcalia concentrated	suitable
Inorganic acids diluted, salt solutions	suitable
Inorganic acids concentrated	suitable
Solvents, other organic compounds	suitable
Lacques, colors [silicone -free]	suitable

This datasheet on the internet: <https://idt-gaskets.com/products/packings/62a03ee767c1aa00c>

General information: All information given in this Technical Information sheet represents our current level of knowledge and serves as information on our products and their respective scopes. It is not meant to ensure any particular properties of any product or the suitability of any product for any specific application, neither does it create any liability on our part. © Copyright by IDT

Forms of delivery

Sold by the meter in boxes.

2 x 15 kg	10 x 8 mm
2 x 15 kg	12 x 10 mm
2 x 15 kg	15 x 10 mm
2 x 15 kg	15 x 20 mm
2 x 15 kg	16 x 8 mm
2 x 15 kg	16 x 12 mm
2 x 15 kg	20 x 10 mm
2 x 15 kg	20 x 12 mm
2 x 15 kg	20 x 13 mm
2 x 15 kg	21 x 16 mm
2 x 15 kg	30 x 15 mm

Gland packings from 20 kg are wound on large rolls at the customer's request.