


Sealmax Style 906

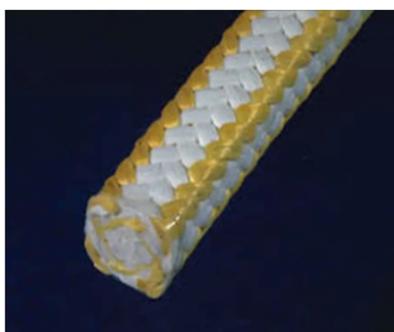

Sealmax Style 906 is a multi-yarn packing with aramid yarn corners impregnated with PTFE, while the friction faces are made from pure PTFE yarns. This construction enhances the lubrication properties of the aramid fibre and improves the mechanical strength of the pure PTFE. STYLE 906 is dimensionally stable and offers excellent lubricating and running characteristics.

Application Areas:

Designed for high pressure reciprocating pumps, medium speed centrifugal pumps, valves, mixers, agitators, and reactors.

Application Media:

Acids, alkalis, and a broad range of chemicals.

Benefits:

High strength combined with excellent lubrication. Non-staining, making it suitable for pulp and paper, pharmaceutical, food, and sugar industries.

OPERATING LIMITS

	ROTATING	RECEIPROCATING	STATIC
Pressure	20 bar	200 bar	180 bar
Shaft Speed	14 m/s		
Density	1.6 g/c m ³		
Temperature	-100°C to +280 °C		
PH Range	2 to 12		

All technical data and recommendations are given based on our experience. However, we assume no liability whatsoever. All data and values must be verified by the user, as the effectiveness of a seal can only be accurately judged by evaluating all data parameters directly on site. The stated parameters of all packing styles are approximate and may be influenced if occurring together. We suggest you to contact us in case of any special applications.



+91-89830-59377
+91-89830-59366



admin@sealmax.net
sales@sealmax.net
www.sealmax.in



119/120 Raj Prabha Land Mark Industrial Estate, 1st Floor,
Building No. 3, Bhoidapada, Vasai (East), District -
Palghar - 401208, India