

Sealmax Style 9007M



Sealmax Style 9007M is manufactured from mineral fiber, aramid fiber, inorganic filler bonded with NBR binder and reinforced with steel wire.

Style 9007M is suitable for use with oils, fuels, lubricants, alcohols, gases, hydrocarbons, steam, water and cooling liquids, and is resistant to most diluted acids and alkalis under medium stress operating conditions.

TECHNICAL SPECIFICATIONS (ALL DATA ARE TYPICAL VALUES AND REFER TO A SHEET THICKNESS OF 2.0 MM)

SR.NO.	PROPERTIES	TEST METHOD	SPECIFIED VALUE	UNIT
1.	Max. Peak Temperature	-	350	°C
2.	Max. Operating Temperature	-	250	°C
3.	Max. Operating Pressure	-	90	bar
4.	Density	ASTM F 1315	1.70 – 2.00	g/cm ³
5.	Compressibility	ASTM F 36 J	7 – 17	%
6.	Recovery	ASTM F 36 J	≥ 50	%
7.	Tensile Strength	ASTM F 152	≥ 10.0	N/mm ²
8.	ASTM Oil No. 3 (5h, 150°C)	ASTM F 146		
8a.	Thickness Increase		≤ 10	%
8b.	Weight Increase		≤ 15	%
9.	Fuel B (5h, 23°C)	ASTM F146		
9a.	Thickness Increase		≤ 10	%
9b.	Weight Increase		≤ 15	%
10.	Water (5h, 100°C)	ASTM F 146		
10a.	Thickness Increase		≤ 10	%
10b.	Weight Increase		≤ 10	%
11.	Stress Relaxation (16h x 175°C)	DIN 52913	≥ 22	MPa

All technical data and recommendations are given based on our experience. However, we assume no liability whatsoever. All data and values must be verified by the user, as the effectiveness of a seal can only be accurately judged by evaluating all data parameters directly on site. The stated parameters of all packing styles are approximate and may be influenced if occurring together. We suggest you to contact us in case of any special applications.



+91-89830-59377
+91-89830-59366



admin@sealmax.net
sales@sealmax.net
www.sealmax.in




119/120 Raj Prabha Land Mark Industrial Estate, 1st Floor,
Building No. 3, Bhoidapada, Vasai (East), District –
Palghar – 401208, India

GENERAL SPECIFICATIONS

SR.NO.	PARTICULARS	REMARKS
1.	Standard Sheet Size	1500 mm x 1500 mm, 1500 mm x 2000 mm, 1500 mm x 3000 mm, 1500 mm x 4000 mm, 1500 mm x 4500 mm, 2000 mm x 3000 mm
2.	Standard Thickness	0.80 mm to 6.0 mm
3.	Tolerance on Width	± 50 mm
4.	Tolerance on Length	± 50 mm
5.	Tolerance on Thickness	< 1mm = ± 0.10mm > 1 mm = ± 10%

Area of Application:

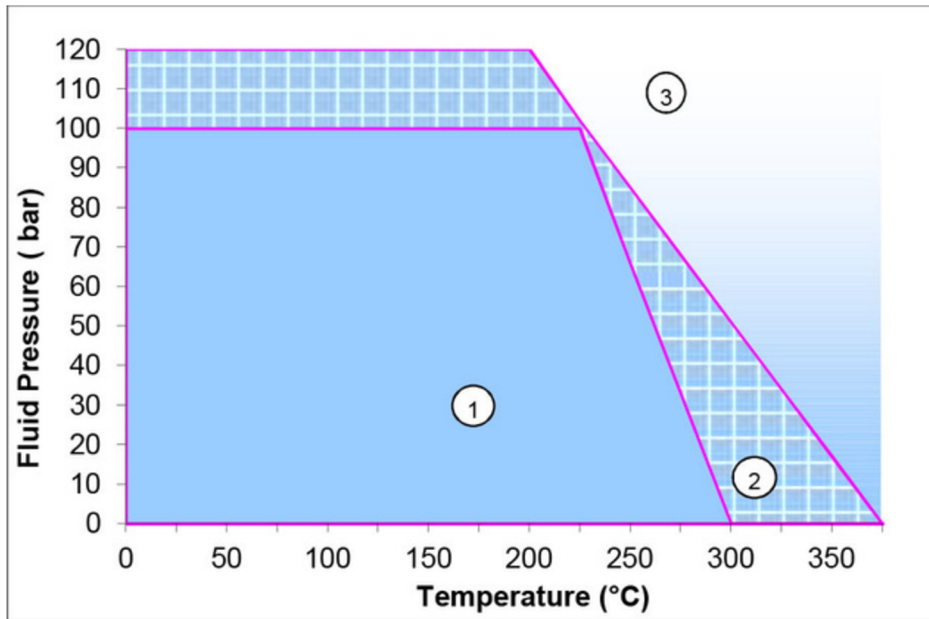

(Refer to pressure-temperature graph)

- Gasket material is normally suitable, subject to chemical compatibility.
- Gasket material may be suitable; technical support is recommended.
- Do not install the gasket without technical evaluation.

All technical data and recommendations are given based on our experience. However, we assume no liability whatsoever. All data and values must be verified by the user, as the effectiveness of a seal can only be accurately judged by evaluating all data parameters directly on site. The stated parameters of all packing styles are approximate and may be influenced if occurring together. We suggest you to contact us in case of any special applications.



+91-89830-59377
+91-89830-59366



admin@sealmax.net
sales@sealmax.net
www.sealmax.in



119/120 Raj Prabha Land Mark Industrial Estate, 1st Floor,
Building No. 3, Bhoidapada, Vasai (East), District -
Palghar - 401208, India